

Project		Catalog #		Type	
Prepared by		Notes		Date	



Metalux

Cruze ST 14CZ2

1' x 4' LED Specification Grade Troffer

Typical Applications

Office • Education • Healthcare • Hospitality • Retail

Interactive Menu

- Order Information page 2
- Photometric Data page 3
- Connected Systems page 5
- VividTune™ Color Tuning Solutions page 6
- Product Warranty

Product Certification




Product Features



Top Product Features


- Latch-less design provides clean architectural look
- VividTune CCT tuning options from 3000K-5000K or 2700K-6500K
- Designers delight - ribbed, smooth and round perforated lens options
- High performance efficacy up to 138 lm/W
- Options to meet Buy American and other domestic preference requirements

Dimensional and Mounting Details

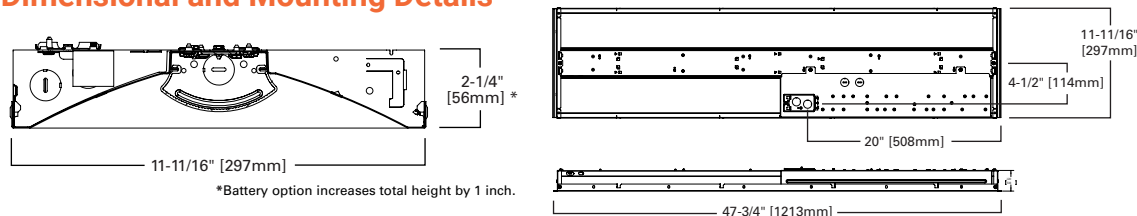


Shielding

2' wide versions shown for detail.

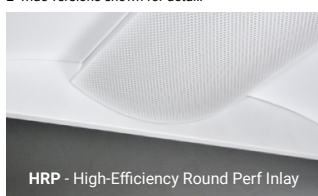

HRP - High-Efficiency Round Perf Inlay

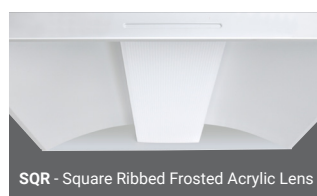

SQR - Square Ribbed Frosted Acrylic Lens

See ordering information for more shielding options.

Ceiling Compatibility

Ceiling Type	Trim Type
G Grid/Lay-in Standard	Standard
G Concealed T	Standard
G Slot Grid	Standard
	Flange *

*See Drywall Frame Kit Accessory in Ordering Information Section

Order Information

SAMPLE ORDER NUMBER: **14CZ2-39HE-UNV-L835-CD1-U**

Domestic Preferences	Rating	Series	Lumen Output	Shielding	Voltage	Options	Emergency Options
Domestic Preferences ⁽¹⁾	Rating	Series	Lumen Output	Shielding ⁽⁴⁾	Voltage ⁽⁵⁾	Options	Emergency Options
[Blank] =Standard BAA =Buy American Act TAA =Trade Agreements Act	[Blank] =Standard ATW-SW4 =Chicago Rated	14CZ2 =1x4 Cruze ST	High Efficacy 39HE =3800 Lumens ⁽²⁾ 48HE =4800 Lumens ⁽²⁾ 60HE =6000 Lumens ⁽²⁾ Standard Efficacy 20 =2000 Lumens 25 =2500 Lumens 29 =2900 Lumens 35 =3500 Lumens 39 =3900 Lumens 44 =4400 Lumens	[Blank] =Ribbed Frosted Acrylic Lens (standard) S =Smooth Frosted Acrylic Lens HRP =High-Efficiency Round Perf Inlay SQR =Ribbed Square Frosted Acrylic Lens	UNV =Universal Voltage 120-277 347V =347 Volt 48V =48 Volt Low-voltage (Class 2) ^(C)	GL =Single Element Fuse GM =Double Element Fuse PAF =Painted After Fabrication	[Blank] =No emergency EL7W =7-watt 120V-277V emergency battery pack ⁽⁶⁾ EL10W =10-watt 120V-277V emergency battery pack ⁽⁶⁾ EL14W =14-watt 120V-277V emergency battery pack ⁽⁶⁾ EL10WSD =10W emergency battery pack with self-diagnostic installed ^{(6),(8)} EL14WSD =14W emergency battery pack with self-diagnostic installed ^{(6),(8)} ELV7W =Low-voltage system, 7-watt emergency battery pack ^(C) ELV14W =Low-voltage system, 14-watt emergency battery pack ^(C) ETRD =Emergency Transfer Relay with dimming control ⁽⁷⁾ RRU =LVS Controls Emergency Transfer Relay with dimming control ⁽⁷⁾ UEL7W =UL924 Listed luminaire, 7-watt, 120V-277V emergency battery pack ⁽⁶⁾ UEL14W =UL924 Listed luminaire, 14-watt 120V-277V emergency battery pack ⁽⁶⁾ UEL10WSD =Bodine 10W emergency battery pack with self diagnostic installed ^{(6),(9)} UETRD =UL924 Listed luminaire, Emergency Transfer Relay with dimming control ⁽⁷⁾ URRU =UL924 Listed luminaire, LVS Controls Emergency Transfer Relay with dimming control ⁽⁷⁾
Notes (1) Only product configurations with these designated prefixes are built to be compliant with the Buy American Act of 1933 (BAA) or Trade Agreements Act of 1979 (TAA), respectively. Please refer to DOMESTIC PREFERENCES website for more information. Components shipped separately may be separately analyzed under domestic preference requirements.			Notes (2) White tuning not available with this model.	Notes (4) Smooth and Perforated versions are not available in Square shape.	Notes (5) Products also available in non-US voltages and frequencies for international markets. (C) Consult Wavelinx Low-Voltage or DLVP system pages for additional details and compatibility.		Notes (6) Factory installed with integral test switch/indicator/laser test. For approximate delivered lumens multiply the lumens per watt of the desired fixture by the wattage of the emergency battery pack (100 lm/W x 7=700 lumens). IES-format photometry for luminaire under emergency operation available. Battery option increases total height by 1 inch. (7) Used to bypass local control during outage. Must be used in conjunction with UL 1008 device (provided by others). Devices are universal voltage (UNV). 347 not available. (8) EL10WSD and EL14WSD not available with 347V. (9) UEL10WSD not available with 347V. (C) Consult Wavelinx Low-Voltage or DLVP system pages for additional details and compatibility.

CRI/CCT	Flex	Driver Type	Number of Drivers
CRI/CCT	Flex	Driver Type	Number of Drivers
L830 =80CRI, 3000K L835 =80CRI, 3500K L840 =80CRI, 4000K L850 =80CRI, 5000K L930 =90CRI, 3000K L935 =90CRI, 3500K L940 =90CRI, 4000K L950 =90CRI, 5000K L83050 =80CRI 3000K-5000K White Tuning ⁽¹⁰⁾ L93050 =90CRI 3000K-5000K White Tuning ⁽¹⁰⁾ L82765 =80CRI 2700K-6500K White Tuning ⁽¹⁰⁾ L92765 =90CRI 2700K-6500K White Tuning ⁽¹⁰⁾	[Blank] =No Flex A3/8-4/18GDIM =3/8" Flex with 0-10V Dimming Leads A3/8-2/18G =3/8" Flex with line and common A3/8-5/18GDIM =Flex with 0-10V Dimming leads and Blue for alternate wiring. See below for details.	CD =0-10V Driver (10%-100% Dimming) HCD =0-10V Driver (1%-100% Dimming) SLTD =DALI Driver (5%-100% Dimming) SLTHD =DALI Driver (1%-100% Dimming) LV =Low-voltage System Driver (0%-100% Dimming) ^(C) SD =Step Dimming Driver (50%-100% Dimming) LH =Lutron HiLume (LDE1 series) 1%-100% EcoSystem Driver with Soft-on Fade to Black dimming ^(F) W2A =White Tuning, 2 ch, Analog 0-10V Intensity and CCT Control ⁽¹¹⁾ SR =Sensor-ready Driver (1%-100% Dimming)	1=1 Driver
Notes (10) White tuning provides correlated color temperatures (CCT) between 3000K (warm) to 5000K (cool) or 2700K (warm) to 6500K (cool). Must be used in conjunction with W2A driver only. Must be used with two (2) 10V dimming control channels, 1 color, 1 intensity. May be combined with Wavelinx sensor control systems only.	Flexible Metal Conduit Options Flex options available for 0-10V dimming control, DALI dimming control, emergency and night light functions. 72-inch factory-installed and pre-wired to driver, fitted to luminaire housing access plate with 90° enclosed FMC connector. Not all options may be combined and installation ratings vary by type. See online configurator for all flex options. A3/8-4/18GDIM series notes: Factory installed dimming option 3/8" flexible metal conduit with 2-#18 power and ground wires and 2-#18 UL-listed jacketed 0-10V +/- control wires. Meets UL 66, 83, 1479, 1569, 1581, 2556. NEC® 250.118, 300.22(C), 392, 396, 330, 501, 502, 503, 530, 504, 505, 518, 520, 530, 645, 72: Federal Specification A-A-59544 (formerly J-C-30B); all applicable OSHA and HUD Requirements. UL Classified 1-, 2-, and 3-hour through penetration with applicable fire stop product (not included). May be surface mounted, fished and/or embedded in plaster. Cable tray and approved raceway rated, install per NEC®; Environmental Air-Handling Space Installation per NEC® 300.22(C).	Notes (11) White tuning provides correlated color temperatures (CCT) between 3000K (warm) to 5000K (cool) or 2700K (warm) to 6500K (cool). Must be used in conjunction with W2A driver only. Must be used with two (2) 10V dimming control channels, 1 color, 1 intensity. May be combined with Wavelinx sensor control systems only. Integrated options must be used in conjunction with the associated system and may not be compatible with other options or accessories. Please refer to the following: (C) Consult Wavelinx Low-Voltage or DLVP system pages for additional details and compatibility. (F) Consult Marketplace Options - Lutron system pages for additional details and compatibility. Compatible only with driver series shown, and may require two or more drivers. Requires field commissioning to operate or dim. Contact Lutron at www.lutron.com .	

Integrated Sensing Systems	Packaging	Accessories
Integrated Sensing Systems ⁽¹²⁾	Packaging	Accessories (order separately) ⁽¹⁶⁾
[Blank] =No Sensor WAA =WaveLinX PRO Wireless Integrated Sensor ^{(17), (A)} WPN =WaveLinX PRO Wireless Node without Sensor ^{(17), (A)} WAB =WaveLinX LITE Wireless Integrated Sensor ^{(18), (B)}	U =Unit Pack PAL =Job Pack, out of carton PALC =Job Pack, in carton	CZ2-EQCLIP-U-PK =Cruze Plus "CZ2" Earthquake Clip Kit (4 clips per bag kit) ⁽¹⁵⁾ DF-14W-U =1' x 4' Drywall Frame Kit SK-14-WT =1' x 4' Tall Surface Mount Kit
Notes (12) Matching width lens band on other side of sensor band may be supplied for symmetrical appearance. Required for use with sensor and emergency combination. Add "D" to sensor ordering as shown - WAAD, WABD. (17) WAA sensor and WPN node to be used with CD, HCD or W2A driver. Consult factory for WPN with tunable white W2A driver. (18) WAB sensor to be used with CD or HCD driver. Integrated options must be used in conjunction with the associated system and may not be compatible with other options or accessories. Please refer to the following: (A) Consult WaveLinX PRO system pages for additional details and compatibility. (B) WaveLinX LITE devices are not currently compatible with the WaveLinX Wireless Area Controller. Consult WaveLinX LITE system pages for additional details and compatibility.		Notes (15) An EQ Grid Clip is recommended for all 9/16" ceiling systems. Four required per fixture. (16) Accessories sold separately will be separately analyzed under domestic preference requirements. Consult factory for further information. Integrated options must be used in conjunction with the associated system and may not be compatible with other options or accessories.

Product Specifications

Construction

- Die formed of code gauge prime cold rolled steel with full length die-formed stiffeners
- Unibody endplates attached with interlocking tabs and screws
- Hemmed side flanges
- Four auxiliary fixture end suspension points
- Integral Grid-lock feature for endplates for added safety
- Optional earthquake clips available

Integrated Controls

- Standard with 0-10V dimming driver (10% standard, 1% optional)
- WaveLinX wireless sensor compatible for standalone, controlled, connected, and IoT capability
- Low-voltage sensor and driver compatible for WaveLinX Low-Voltage and DLVP applications
- DALI 2.0, Lutron, and step-dimming available

LED and Light Engine

- LED's available in 3000K, 3500K, 4000K, or 5000K at 80 CRI minimum and 90 CRI minimum
- Color accuracy ≤ 3 -Step MacAdam ellipse (SDCM)
- TM21 life at 60,000 hours up to L90 and calculated L70 exceeds 203,000 hrs.
- Drivers available in 120-277V and 347V
- Tunable white options available with Cooper Lighting Solutions' VividTune

Emergency Battery Options

- 120V-277V integral emergency battery pack comes in 7-watts, 10-watt, or 14-watts
- Self-diagnostic emergency battery available in 10 or 14-watts (NFPA 101® Life Safety Code®)
- Constant power to the LED system for controlled, predictable discharge
- Integrated test switch/indicator light visible from floor
- Min. 90-minute backup period for code compliance
- Integral emergency transfer relay available for generator equipped power systems

Shielding

- Ribbed acrylic frosted lens standard
- Optional smooth acrylic frosted lens (S)
- Optional square ribbed frosted acrylic lens (SQR)
- Optional High-Efficiency Round Perf Inlay (HRP)
- Replacement lenses available, contact factory

Compliance

- IC rated for insulation contact
- cULus listed for damp locations
- RoHS compliant
- Tested to IESNA LM-79 and LM-80
- Stated life tested to TM21 standards
- Can be used for State of California Title 24 high efficacy luminaire

Warranty


- Five-year warranty standard. Optional ten year warranty available.

Finish

- Multistage, iron phosphate pretreatment
- 90% reflective, matte white enamel finish
- Full fixture housing pre-painted matte white (choose PAF option for "Paint after Fabrication")


Photometric Data

 View IES files

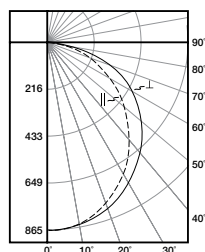

14CZ2-25-UNV-L830-CD1-U

Dimming Driver
 Linear LED 3000K
 Spacing criterion: (II) 1.19 x mounting height, (⊥)
 1.28 x mounting height
 Lumens: 2459
 Input Watts: 20.5W
 Efficacy: 120 LPW
 Test Report: 14CZ2-25-UNV-L830-CD1-U.IES

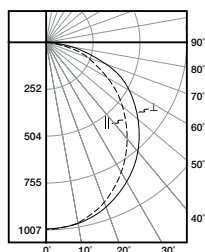

14CZ2-29-UNV-L830-CD1-U

Dimming Driver
 Linear LED 3000K
 Spacing criterion: (II) 1.19 x mounting height, (⊥)
 1.27 x mounting height
 Lumens: 2863
 Input Watts: 24.3W
 Efficacy: 117.8 LPW
 Test Report: 14CZ2-29-UNV-L830-CD1-U.IES

Energy and Performance Data

Standard Efficacy Versions – Single Row of LEDs Default CCT/Lumen Setting: 3500K/Med

Catalog Number	Lumens	Watts	lm/W
14CZ2-20-UNV-L835-CD1-U	2057	15.6	132
14CZ2-25-UNV-L835-CD1-U	2582	19.0	136
14CZ2-29-UNV-L835-CD1-U	2889	20.5	141
14CZ2-35-UNV-L835-CD1-U	3699	28.5	130
14CZ2-39-UNV-L835-CD1-U	3989	27.3	146
14CZ2-44-UNV-L835-CD1-U	4522	34.6	131

High Efficacy Versions – Two Rows of LEDs Default CCT/Lumen Setting: 3500K/Med

Catalog Number	Lumens	Watts	lm/W
14CZ2-39HE-UNV-L835-CD1-U	3989	27.6	145
14CZ2-48HE-UNV-L835-CD1-U	4795	33.4	144
14CZ2-60HE-UNV-L835-CD1-U	6147	43.7	141

Shielding

Lumen Adjustment Factors		
S	HRP	SQR
1.01	0.80	0.96

Lumen Calculator

CCT Multiplier	80 CRI	90 CRI ⁽¹⁾
3000K	0.965	0.827
3500K	1.000	0.847
4000K	1.019	0.856
5000K	1.019	0.909

Notes: (1) Input wattages for 90 CRI versions may vary. Refer to published IES-format photometry or LM-79 reports for more details.

Example of Lumen Adjustment Calculation

14CZ2-35-UNV-L935-CD1-U at 90CRI at 3500K

Lumen Adjustment Factor = 0.845

Total Light Output =

$3,545 \text{ lm} \times 0.845 = 2,996 \text{ lm}$

Efficacy = $\frac{2,996 \text{ lm}}{31.2 \text{ W}} = 96.1 \text{ lm/W}$

Lumen Maintenance

Version	TM-21 Lumen Maintenance (60,000 hours) ⁽²⁾	Theoretical L70 (Hours) ⁽³⁾
Standard	> 85%	> 151,000
High Efficiency	> 90%	> 203,000

Notes: (2) Supported by IES TM-21 standards. (3) Theoretical values represent estimations commonly used; however, refer to the IES position on LED Product Lifetime Prediction, IES PS-10-18, that explains proper use of IES TM-21 and LM-80.

Load Data (Stock Product)


Thd	6%
Power Factor	0.99
Weight (lbs.)	9.9
Low Temp. Start	-20°C

Shipping Data

Catalog No.	Wt.	Pallet 52"L x 49"W x 53.5"H
1' x 4'	22 lbs.	32

Control Systems

- WaveLinX PRO Wireless
- WaveLinX LITE Wireless
- WaveLinX Wired

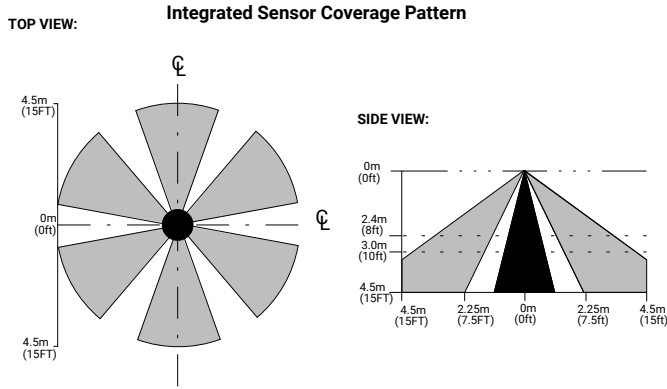

Note: Installation of integrated sensors within 3-ft (1m) of HVAC air vents is not recommended. The pattern shown is intended solely as a general guide and is not to scale.


The Cruze ST with WaveLinX offers no-hassle lighting control with multiple luminaire level control solutions.

WaveLinX PRO is used for applications where spaces need to be connected to a lighting or building management system and to help building owners improve their operations, building environment, and tenants' experience by leveraging the data generated by the sensors. The WaveLinX PRO devices communicate with each other via the WaveLinX Area Controller which coordinates the data traffic between the devices, lighting apps and CORE platform. The WaveLinX Area Controller also hosts the time clock required if spaces need to be turned on/off at a specific time.


The WaveLinX PRO Sensor offers built-in occupancy and daylighting controls as well as luminaire level control including white tuning while the WaveLinX PRO Node offers luminaire level control and white tuning. If opting for the WaveLinX PRO Node option, a PRO Ceiling Sensor will most likely be needed within the space to control the lights based on occupancy and daylight levels.

WaveLinX LITE is used for single spaces where there is no need to manage the spaces remotely or exchange the sensor data with other sub-systems within the building or smart applications.

The WaveLinX LITE Sensor offers built-in occupancy and daylighting controls as well as luminaire level control.

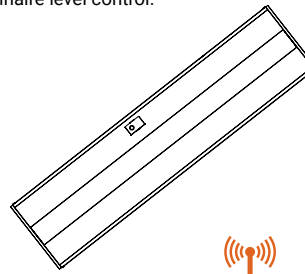

With Integrated WaveLinX Sensor

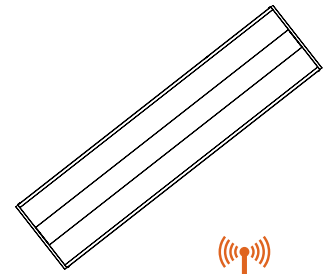


With Integrated WaveLinX Node

Systems comparison chart

Cooper Lighting Solutions provides many lighting system solutions designed to satisfy code requirements and meet the unique needs of any project.



Luminaire with standalone sensor



Standalone Spaces WaveLinX LITE



Networked Spaces WaveLinX PRO



Enterprise WaveLinX CORE

Occupancy	Yes	Yes	Yes	Yes
Daylighting	Yes	Yes	Yes	Yes
Wallstations	–	Yes	Yes	Yes
Gateways	–	–	1 WAC	300 WACs
Devices (MAX)	–	50 per Area (1400 per site)	200 per WAC2	32,500 per CORE Enterprise
Software	–	WaveLinX LITE Mobile App	WaveLinX Mobile App	CORE
Areas	–	28 per Site	50 per WAC2	up to 3,000
Zones	–	16 per Area	16 per Area	up to 9,000
Scheduling	–	–	Local	Global
VividTune™	–	–	Yes	Yes
Plug-Load Control	–	–	Yes	Yes
Low-Voltage Power	–	–	Yes	Yes
Integration	–	–	–	BACnet, API
Dashboards	–	–	–	Energy, Occupancy
Configuration	–	Installer	Technician	Technician / IT


SCALABILITY





14 Cruze ST LED with VividTune Tunable White

VividTune tunable white luminaires from Cooper Lighting Solutions deliver high-quality light in a broad range of continuously variable color temperatures and intensities. Create a dynamic environment by adjusting the ambient light warmer or cooler to influence mood, support the task at hand, or create a dramatic ambience. The ability to control correlated color temperature and intensity separately using simple controls is the next evolution of LED lighting for the commercial, educational, healthcare and hospitality space. The unparalleled flexibility and number of available lighting environments enable users to find the right light with tunable white.

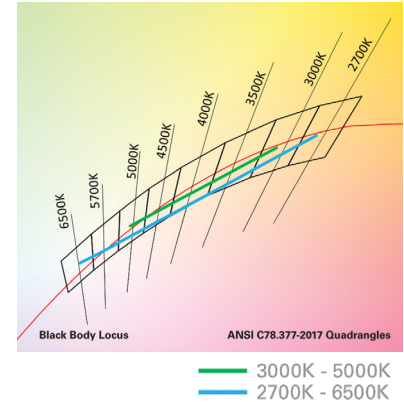


Performance Data*

Tunable White - Lumen Adjustment Factors				
CCT	3000K-5000K		2700K-6500K	
	80 CRI	90 CRI	80 CRI	90 CRI
2700K	-	-	0.903	0.771
3000K	0.929	0.765	0.928	0.801
3500K	0.983	0.836	0.961	0.842
4000K	1.033	0.903	0.981	0.868
4500K	1.042	0.918	0.999	0.891
5000K	1.042	0.918	1.013	0.909
6500K	-	-	1.028	0.933

1' x 4' Cruze ST LED - Example of Approximate Lumen Calculation			
	Standard Catalog #	VividTune 80 CRI Catalog #	VividTune 90 CRI Catalog #
CCT Setting	14CZ2-35-UNV-L835-CD1-U	14CZ2-35-UNV-L83050-W2A1-U	14CZ2-35-UNV-L93050-W2A1-U
3000K	-	3294	2712
3500K	3545	3486	2963
4000K	-	3660	3200
4500K	-	3695	3255
5000K	-	3695	3255

Controlling VividTune Tunable White

VividTune luminaires make tunable white more accessible by using simple and familiar controls. From wall dimmers to wireless controls, VividTune tunable white luminaires are compatible with industry standard 0-10V dimming controls. A single 0-10V dimming input is used to control intensity (brightness) while a second 0-10V dimming input is used to adjust CCT. For suggested control configurations, go to www.cooperlighting.com for tunable white application guides.

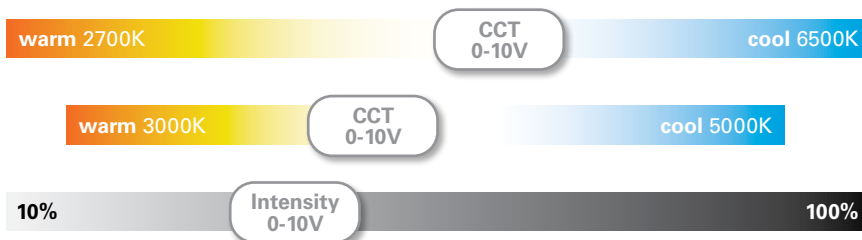

Example of Lumen Adjustment Calculation

14CZ2-35-UNV-L83050-W2A1-U
at 80 CRI tuned to 3500K

Adjusted Lumen =
published lm x adjusted lm factor

Adjusted Lumen = 3545 x 0.983

Adjusted Lumen = 3486 lm

* Lumen adjustment factors are for reference
and may be different for each product selected.
Refer to IES files for actual performance data on each.